




NTN BELEZA- CO.,LTD.

101,6 mm x 190,5 mm x 57,531 mm NTN 4T-HH221449/HH221410 Rolamentos de rolos gravados

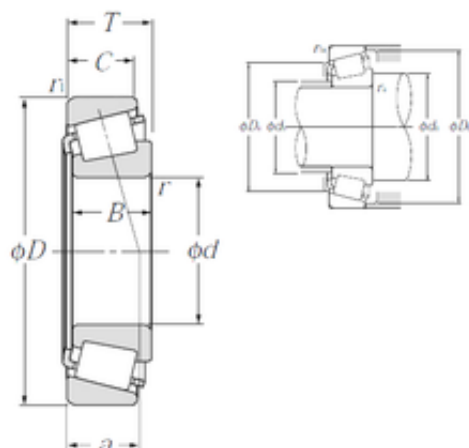

Bearing No. 4T-HH221449/HH221410

4T-HH221449/HH221410 Bearing 2D drawings and 3D CAD models

Size	101.6x190.5x57.15 mm
Bore Diameter	101,6 mm
Outer Diameter	190,5 mm
Width	57,15 mm
d	101,6 mm
D	190,5 mm
T	57,15 mm
B	57,531 mm
C	46,038 mm
ra1 max.	3,3 mm
a	14,4 mm
Da	171 mm
db	116 mm
ra max.	8 mm
da	131 mm
Db	179 mm
Weight	7,06 Kg
Basic dynamic load rating (C)	445 kN
Basic static load rating (C0)	610 kN
(Grease) Lubrication Speed	1 900 r/min
(Oil) Lubrication Speed	2 600 r/min
Calculation factor (e)	0,33
Calculation factor (Y0)	0,99
d1	141.5 mm



NTN BELEZA- CO.,LTD.

e	0.33
Y2	1.79
Y0	0.99
Mass	7.06 kg
Dynamic load, C	445 kN
Rating life coefficient, A2	1.4
Static load, C0	610 kN
Fatigue limit load, Cu	66.6 kN
Nlim (oil)	2,600 rpm
Nlim (grease)	1,900 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.83 Hz
Characteristic outer ring frequency, BPF0	7.12 Hz
Characteristic inner ring frequency, BRFI	9.88 Hz
ra max	8 mm
r1a max	3.3 mm